


Firestop coating CP 670

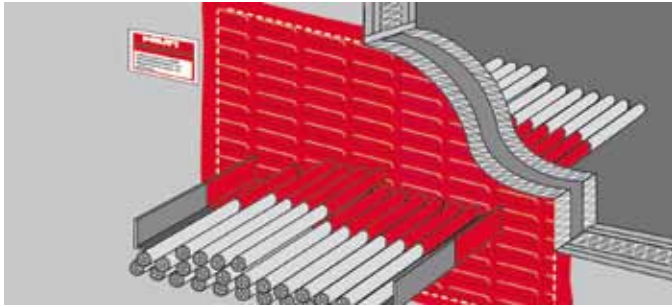

Applications

- Permanent firestopping of blank openings, cables, cable trays, non-combustible and combustible pipes in medium-to-large wall and floor openings
- Ideal for large openings

Advantages

- Highly flexible coating dries quickly to form an elastic protective layer
- Dry film thickness 0.7 mm - up to 30% material savings
- Single-layer coating - up to 50% labor savings



Technical data

Base materials	Drywall, Concrete, Masonry
Intumescent	No
Re-penetration	Possible
Application temperature range	5 - 40 °C
Complementary products	CP 606
Fire rating	See Approvals
Temperature resistance range	-40 - 100 °C
Storage and transportation temperature range	5 - 30 °C
Acoustic insulation	Yes
Approvals	BS 476-20, ETA



Ordering designation	Weight	Sales pack quantity	Item number
CP 670 6kg	6 kg	1 pc	376023
CP 670 17,5kg	17.5 kg	1 pc	286955

Please visit our website for the latest item numbers and related products.